LZ OIL-FREE COMPRESSOR

A zero-compromise oil-free air solution

Atlas Copco





ABSOLUTELY CLEAN AIR

When your operations require unquestionably clean air, "technically oil-free" really won't do. Oil-injected compression, even filtered, cannot guarantee that all oil vapors, aerosols and other contaminants are removed from the air. Thanks to the pioneering Atlas Copco oil-free technology built into the LZ, you can be sure of absolutely clean air.

FIRST-CLASS RELIABILITY

With an operational lifetime of 16,000 hours, the LZ is a long-term companion. This supreme reliability stems from the LZ's quality components as well as its compression technology. Because the LZ doesn't use any oil, it will last longer with only minimal service. No oil changes are required.

HIGH EFFICIENCY

Energy use matters, as it constitutes the highest cost of running a compressor. The direct driven LZ comes with a number of innovations (one-bearing motor, load/stop technology, etc.) to reduce energy consumption to an impressive minimum.

LOW NOISE

Thanks to its sound-attenuating materials and canopy, the LZ offers noise levels as low as 67 dB(A). With this silent performance previously unattainable for an oil-free piston compressor, the LZ is suitable for sound-sensitive environments.

ADVANCED CONTROL

The LZ comes with the Atlas Copco Elektronikon® already built in to give you advanced electronic control and monitoring. The one-touch controller is easy to use, optimizing both performance and reliability.



LZ

The zero-compromise piston compressor

Continuous operation

Lubricated compressors operate up to 20% of their running time in cool-down mode. Thanks to its oil-free technology and internal cooling fan system, the LZ can offer a 100% duty cycle for uninterrupted service.

Quality air

- ISO 8573-1 Class 0 pump produces TÜV-certified 100% clean air.
- Dryer and filters included as standard in the full feature and pack versions.

Complete control

- Dual pressure set point.
- Remote control.
- Remote alarm.
- Integrated saver cycles.
- Integrated smart algorithm for cooling and duty cycle.
- Maintenance schedule.
- Pressure, temperature and lifetime monitoring.



Energy savings

- Direct drive technology offers major energy savings compared to belt-driven compressors.
- Start-stop technology eliminates waste during the unload cycle.
- One-bearing motor to reduce mechanical friction.



Reliability

- Patented stainless steel inlet/outlet pump valves.
- Long lifetime of 16,000 hours.
- Unbeatable low maintenance costs.

Flexibility

- Full range with different power (7–20 hp), pressure (4–10 bar) and electric potential (230/400/460V) options.
- Pack and full feature, base and tank mounted versions available (for the LZ 7/10).





The Atlas Copco

was designed and developed in the

Atlas Copco piston

in Italy.

center of excellence

LZ compressor



4 - Atlas Copco LZ compressors — Atlas Copco LZ compressors - Atlas Copco LZ compressors - 5

NEED NITROGEN? ADD THE LZ

Are you a frequent user and/or producer of nitrogen? The Atlas Copco LZ is the high-performance, cost-saving foundation of your nitrogen generation system. Unlike lubricated compressors, the oil-free LZ doesn't require additional filtration equipment.


As a result, the LZ gives you a more compact footprint, lower maintenance and minimized downtime. Because the LZ doesn't compromise the adsorbent of the nitrogen generator, your system will last longer as well.

STILL USING NITROGEN BOTTLES?

Atlas Copco nitrogen generation systems combine a compressor with a nitrogen generator to create the sustainable and cost-efficient alternative to cylinders or bulk supply. A nitrogen generation system provides an independent supply of nitrogen, when you need it and at the lowest cost, eliminating ordering, transportation, storage and delivery expenses.




Traditional nitrogen generation systems:

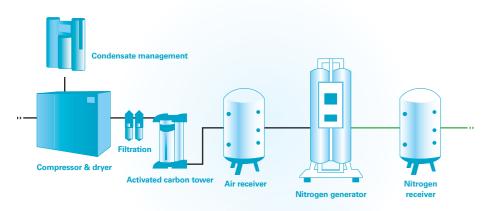



LZ-powered nitrogen generation systems:

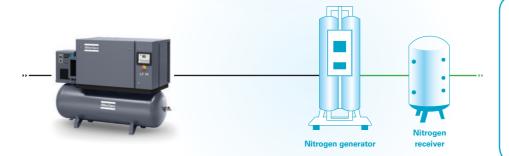

- Smaller investment.
- Reduced maintenance cost.
- Increased generator lifetime.

TECHNICAL SPECIFICATIONS

PERFORMANCE

Com- pressor	Maximum working pressure		FAD @ 50 Hz			FAD @ 60 Hz			Installed recommended power		Noise level	Ves- sel	Ver- sion	Dewpoint FF	
type	bar(e)	psig	l/s	m³/ min	cfm	l/s	m³/ min	cfm	kW	hp	db(A)	ı		°C	°F
LZ 7-10	10	145	11	0.66	23.3	12	0.72	25.4	5.5	7.5	71	270 500	BM/ TM/ FF*	3	37
LZ 10-10	10	145	15.5	0.93	32.8	18.2	1.1	38.9	7.5	10	73	270 500	BM/ TM/ FF*	3	37
LZ 15-10	10	145	22	1.32	46.6	24	1.44	50.8	11	15	74	-	ВМ	-	-
LZ 20-10	10	145	31	1.86	65.6	36.4	2.2	77.8	15	20	76	-	ВМ	-	-

^{*} BM: base mounted – TM: tank mounted – FF: full feature.

^{****} Mean noise level measured according to ISO 2151/Pneurop/Cagi PN8NTC2 test code; tolerance 3 dB(A).







Tank mounted: LZ 7/10



Full feature: LZ 7/10

REFERENCE CONDITIONS

Absolute inlet pressure	1 bar (14.5 psi)
Intake air and coolant temperature	20 °C, 68 °F
FAD	measured at 7 bar

DIMENSIONS

Dimensions	Ba	ise moun	ted		ull featur 2701 vesse	-	Full feature 500l vessel			
Difficusions	L (mm)	W (mm)	H (mm)	L (mm)	W (mm)	H (mm)	L (mm)	W (mm)	H (mm)	
LZ 7/10	1442	808	871	1752	808	1315	1984	808	1457	
LZ 15/20	1440	808	1614	-	-	-	-	-	-	

6 - Atlas Copco LZ compressors — Atlas Copco LZ compressors - Atlas Copco LZ compressors - 7

^{**} Voltage: 400 50Hz - 230/380/460 60Hz.

^{***} Unit performance measured according to ISO 1217, Ed.3, Annex C-2009.

COMMITTED TO SUSTAINABLE PRODUCTIVITY

We stand by our responsibilities towards our customers, towards the environment and the people around us. We make performance stand the test of time. This is what we call – Sustainable Productivity.



